


Gel-Filled Loose Tube Self Support Aerial Cable (Figure-8; Steel Central Strength Member Non/Aluminum/Steel Tape Armored)

GYFTC8Y/A/S-Aerial

- Phosphate or galvanized steel wire central strength member
- Loose tube stranded
- PE sheath
- Figure 8 self-supporting aerial cable

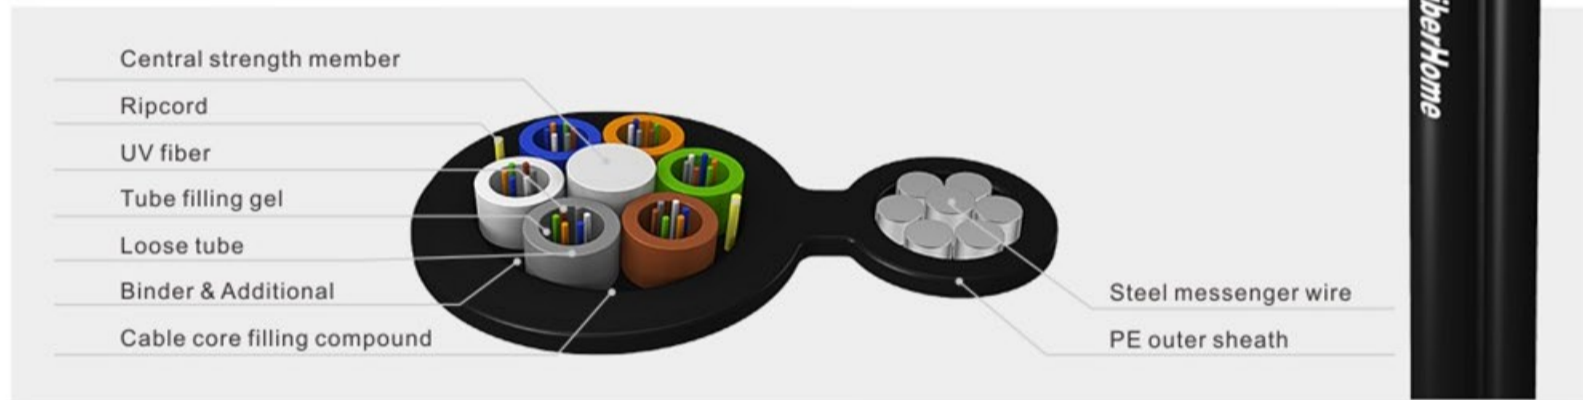

Performance

Application

- Long haul and building network communication

Operating Temperature

- -40°C~+70°C

Features and Benefits

Water-blocking construction

Moisture-proof and prevents water penetration

Special filling gel in loose tubes

Reduce or eliminate reflection losses and prevent water penetration

Phosphate or galvanized steel wire as hanging member

Figure-8 self-supporting structure presents high tensile strength and enables easy and cost saving aerial installation

Strict craft and raw material control enable

Lifespan over 30 years

Note:

- Span within 50 meters, longer span available.
- For flame retardant cable, LSZH (Low-Smoke Zero Halogen) material is applicable to outer sheath and the type is GYTZC8Y/A/S
- Longitudinal color strip on outer sheath can be provided according to customer's requests. More details, please refer to GYFZA.

Technical Specification

Fiber Count	Nominal Diameter (mm)	Nominal Weight (kg/km)	Max Fibers per Tube	No. of (Tubes + Fillers)	Allowable Tensile Load (N)		Allowable Crush Resistance (N/100mm)	
					Short Term	Long Term	Short Term	Long Term
2~30	9.4x 17.4	156	6	5	7000	4000	1000	300
32~36	10.0x 18.0	170	6	6	7000	4000	1000	300
38~60	10.6x 18.6	175	12	5	7000	4000	1000	300
62~72	10.9x 19.0	185	12	6	7000	4000	1000	300
>72	Available upon customer's request							

*Customized cable structure is available